


Robert E. Bolton Associates

architecture • land planning

207 FAIRBANKS ROAD, MT LAUREL, N.J. (609)-204-0350

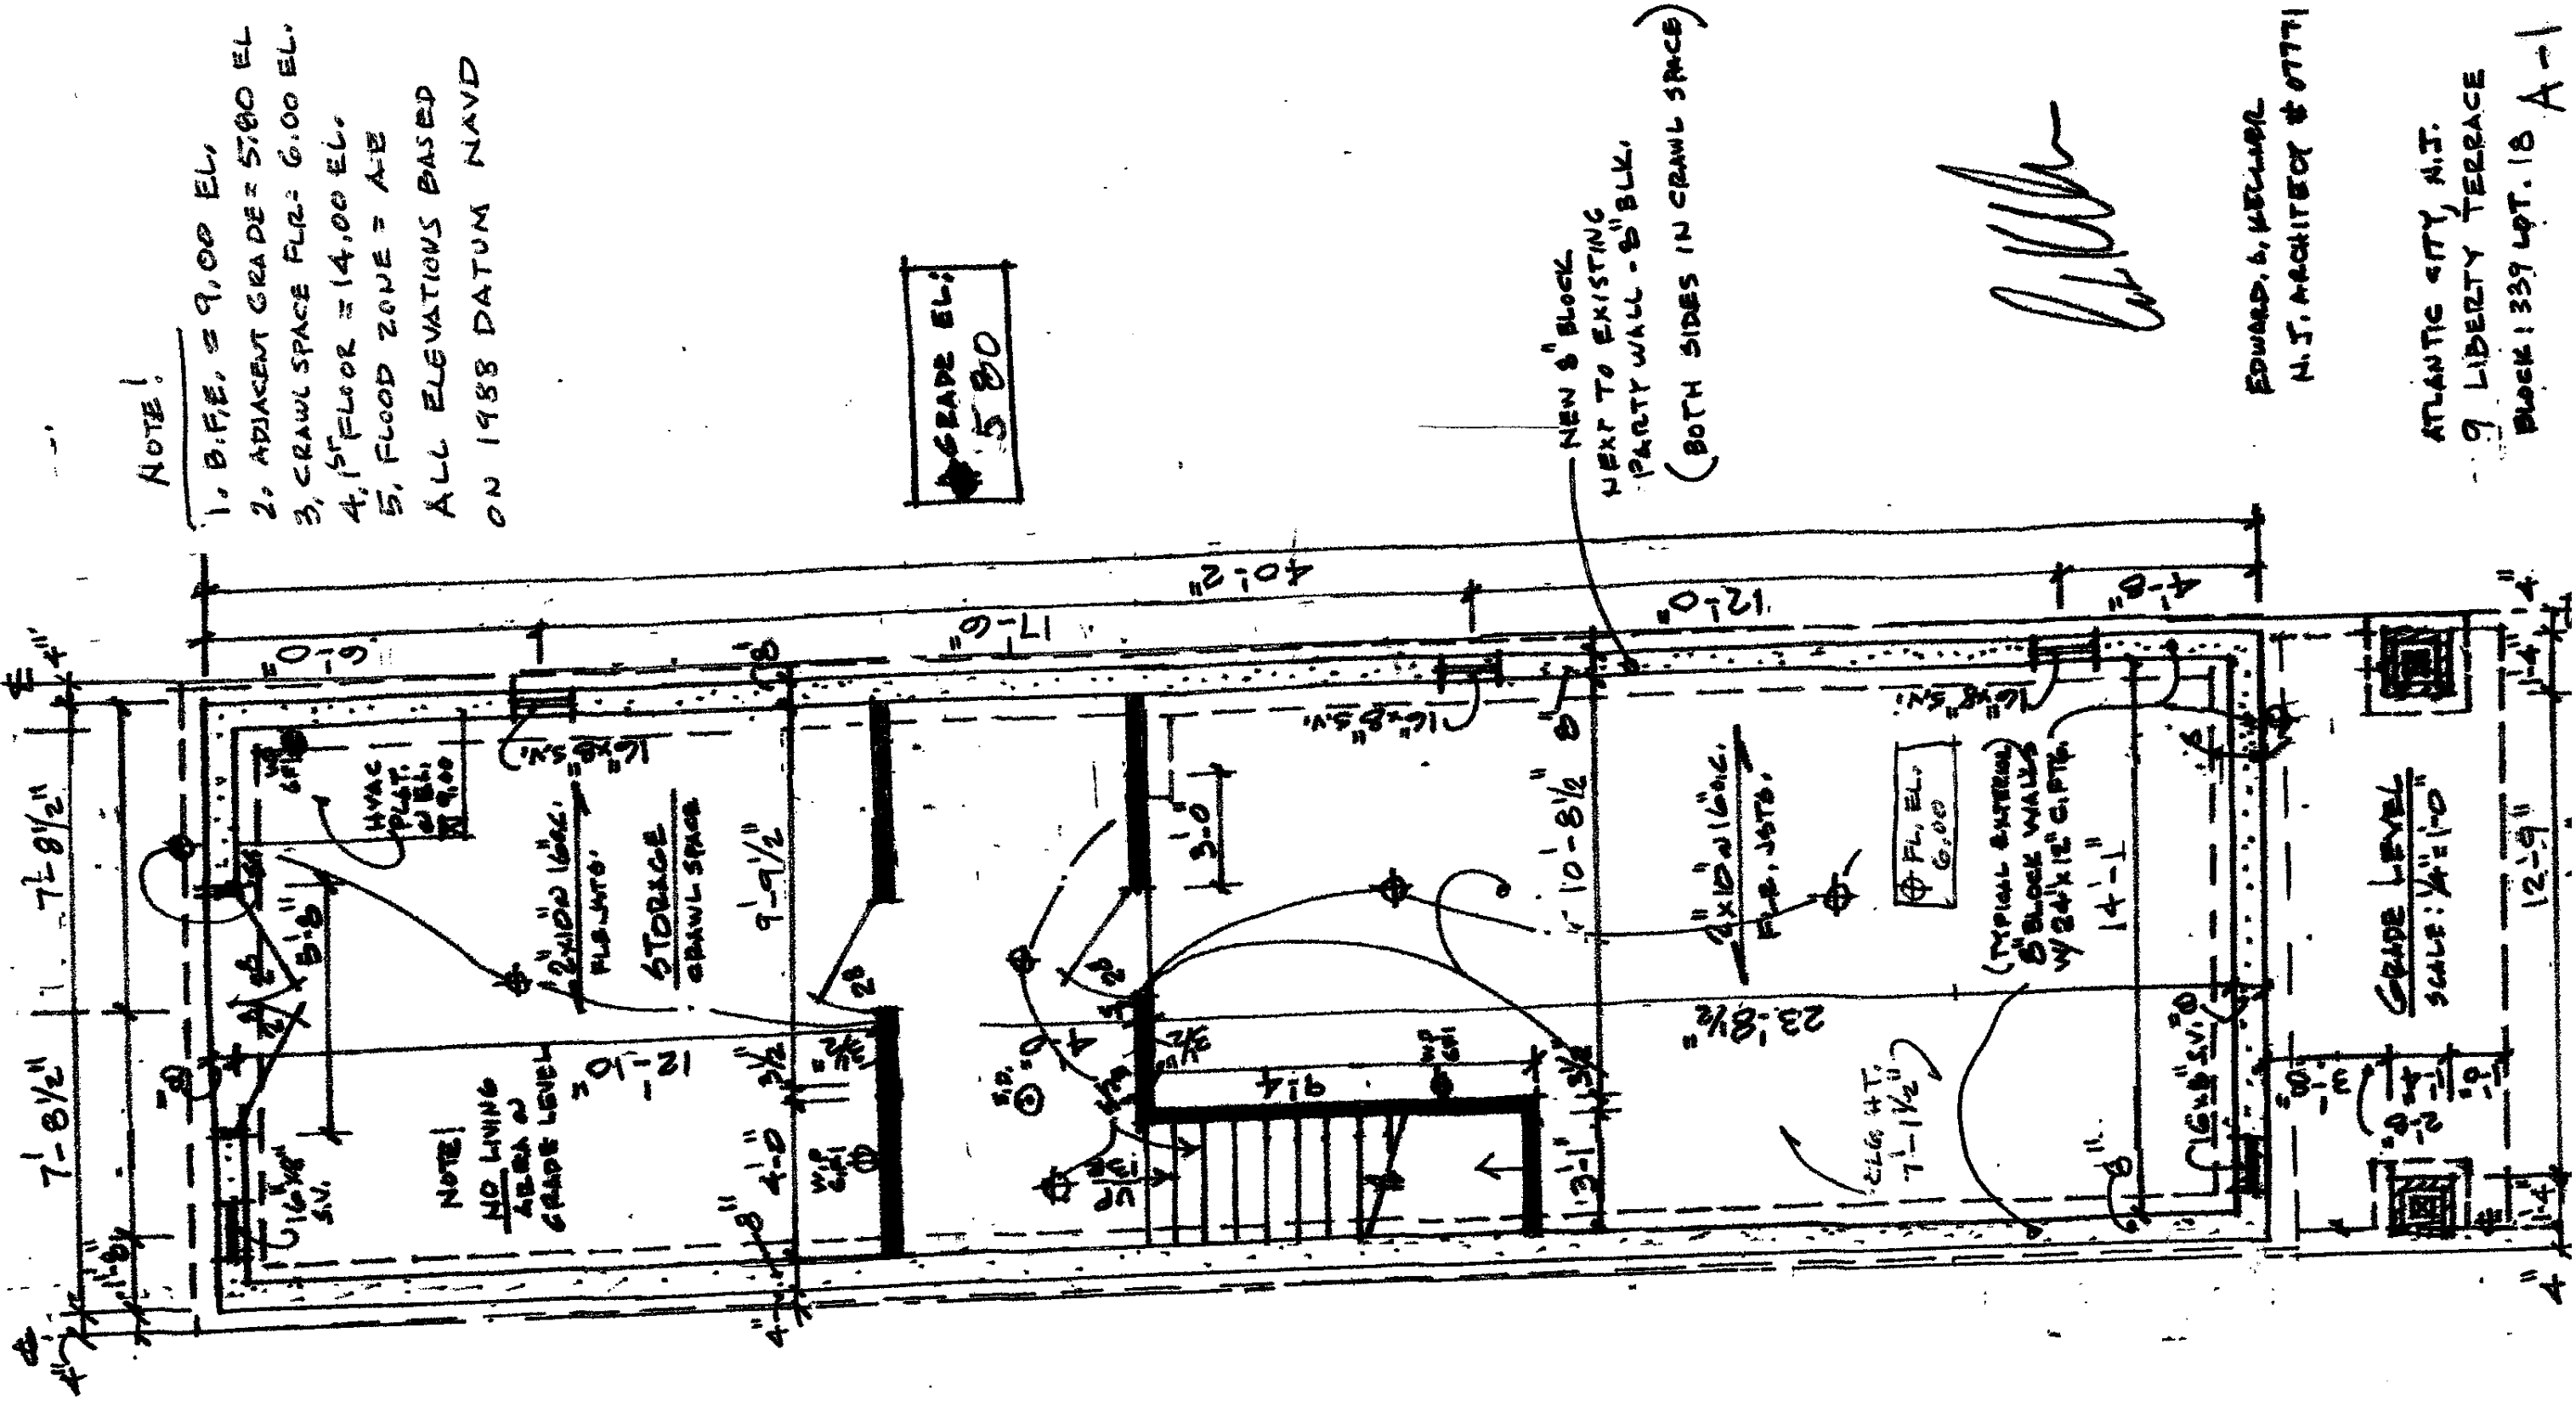

NOTE!

1. B.F.E. = 9.00 EL.
 2. ADJACENT GRADE = 5.80 EL.
 3. CRAWL SPACE FLR = 6.00 EL.
 4. 1ST FLOOR = 14.00 EL.
 5. FLOOD ZONE = AE
- ALL ELEVATIONS BASED ON 1988 DATUM NAVD

GRADE EL:
5.80

NEW 8" BLOCK
NEXT TO EXISTING
PARTY WALL - 8" BLK.
(BOTH SIDES IN CRAWL SPACE)

Edward S. Mellor

EDWARD S. MELLOR
N.J. ARCHITECT # 07771


ATLANTIC CITY, N.J.
9 LIBERTY TERRACE
BLOCK 1339 LOT 18 A-1

NOTE!

NO LIVING AREA ON GRADE LEVEL

FLR EL. 6.00

GRADE LEVEL
SCALE: 1/4" = 1'-0"

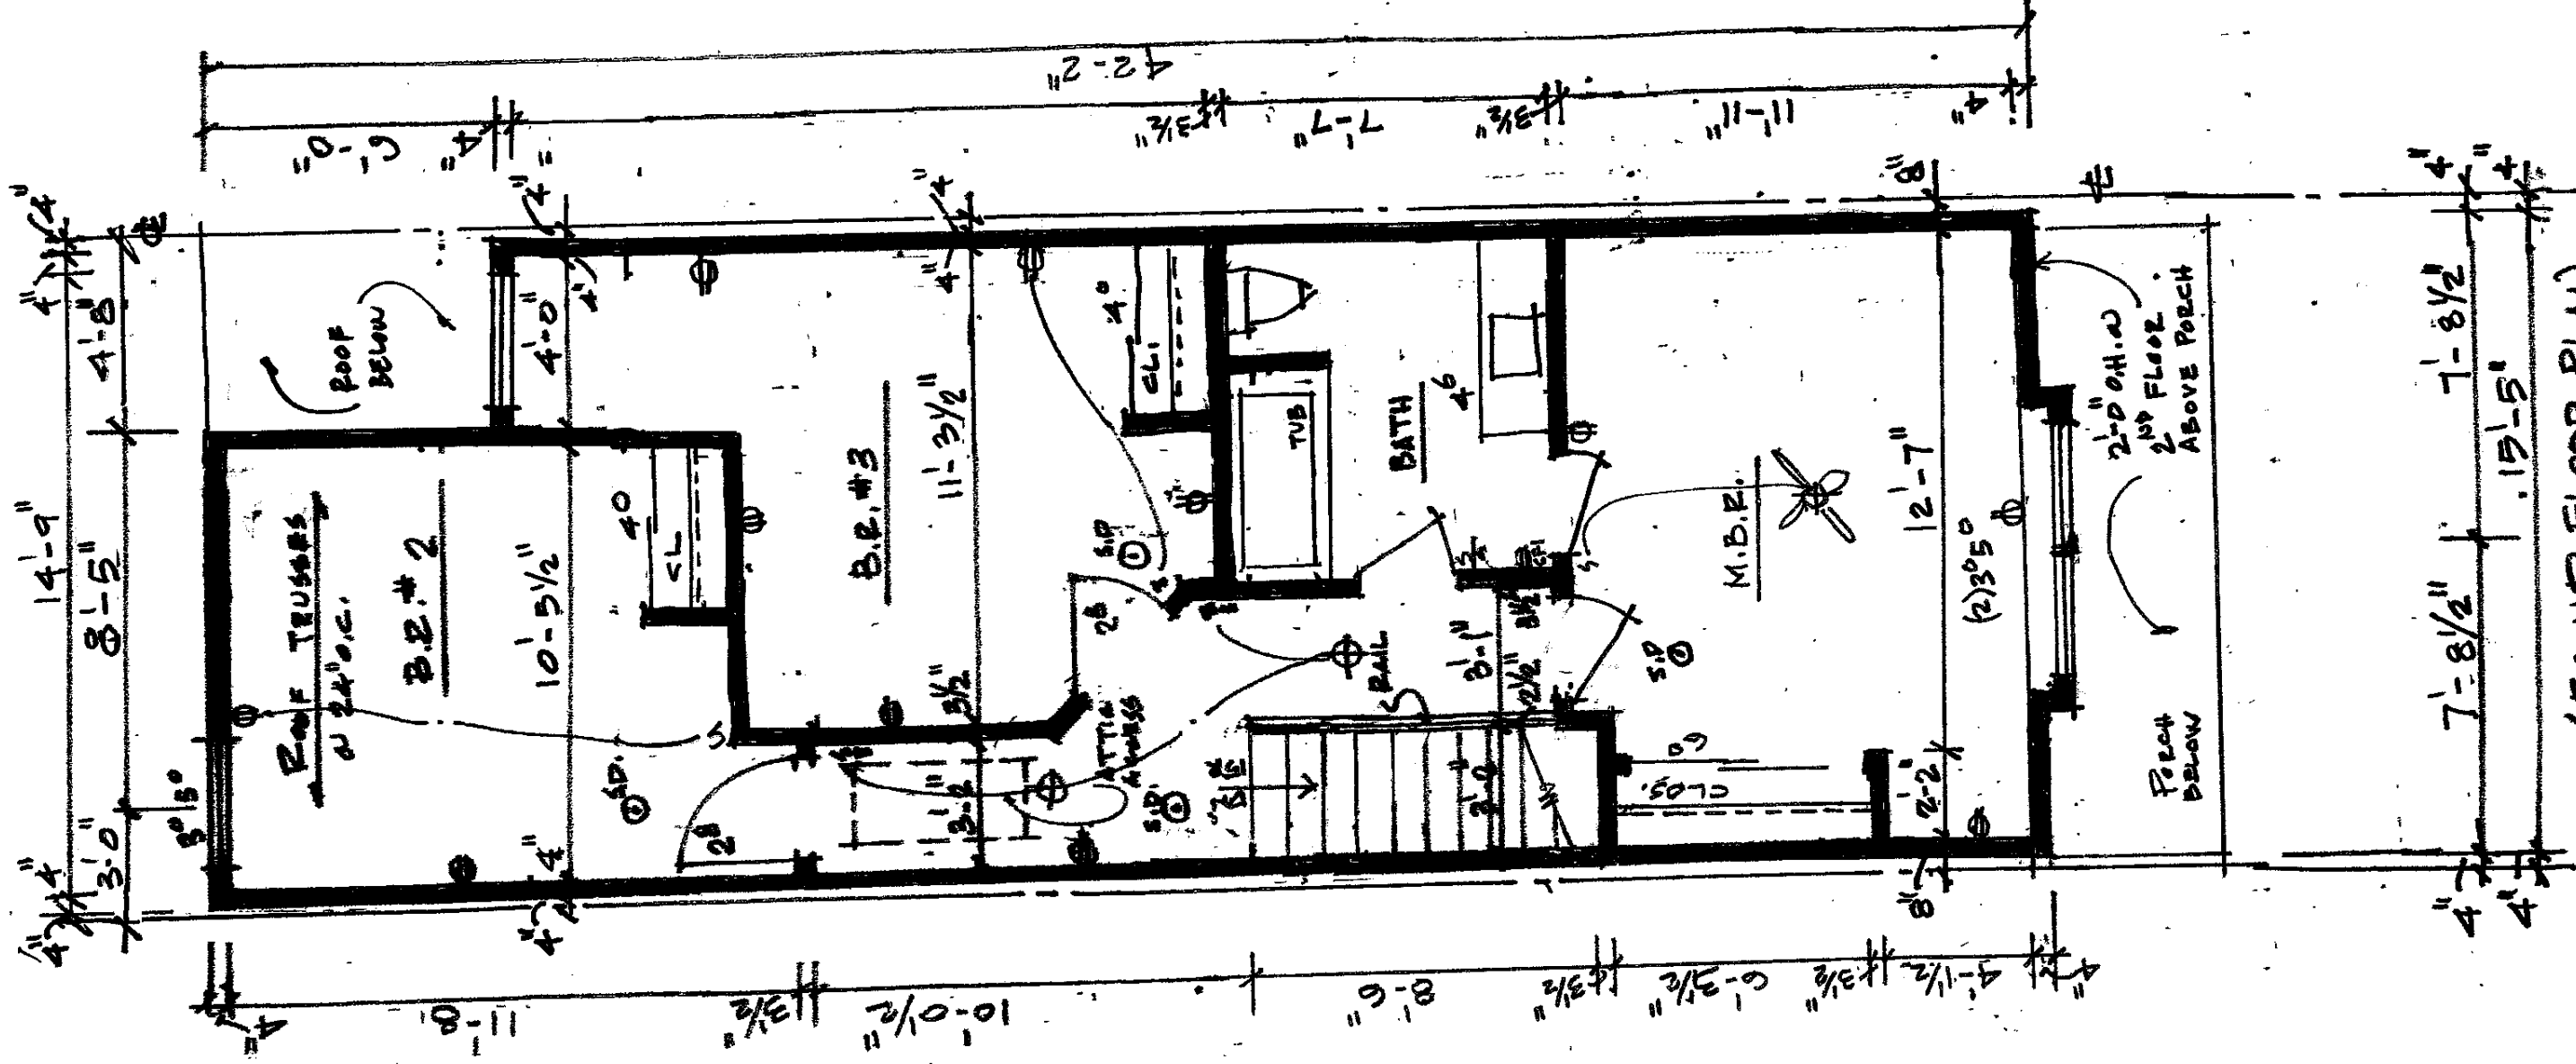

SECOND FLOOR PLAN





Ed Keller

EDWARD L. KELLNER
N.J. ARCHITECT # 07771

ATLANTIC CITY, N.J.
9 LIBERTY TERRACE
BLK 339 LOT 18
A-3


REAR ELEVATION
SCALE: 1/4" = 1'-0"

FRONT ELEVATION
SCALE: 1/4" = 1'-0"

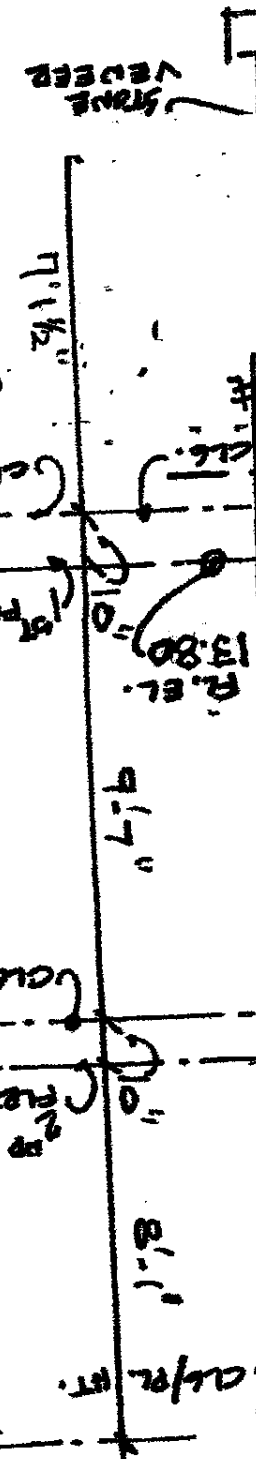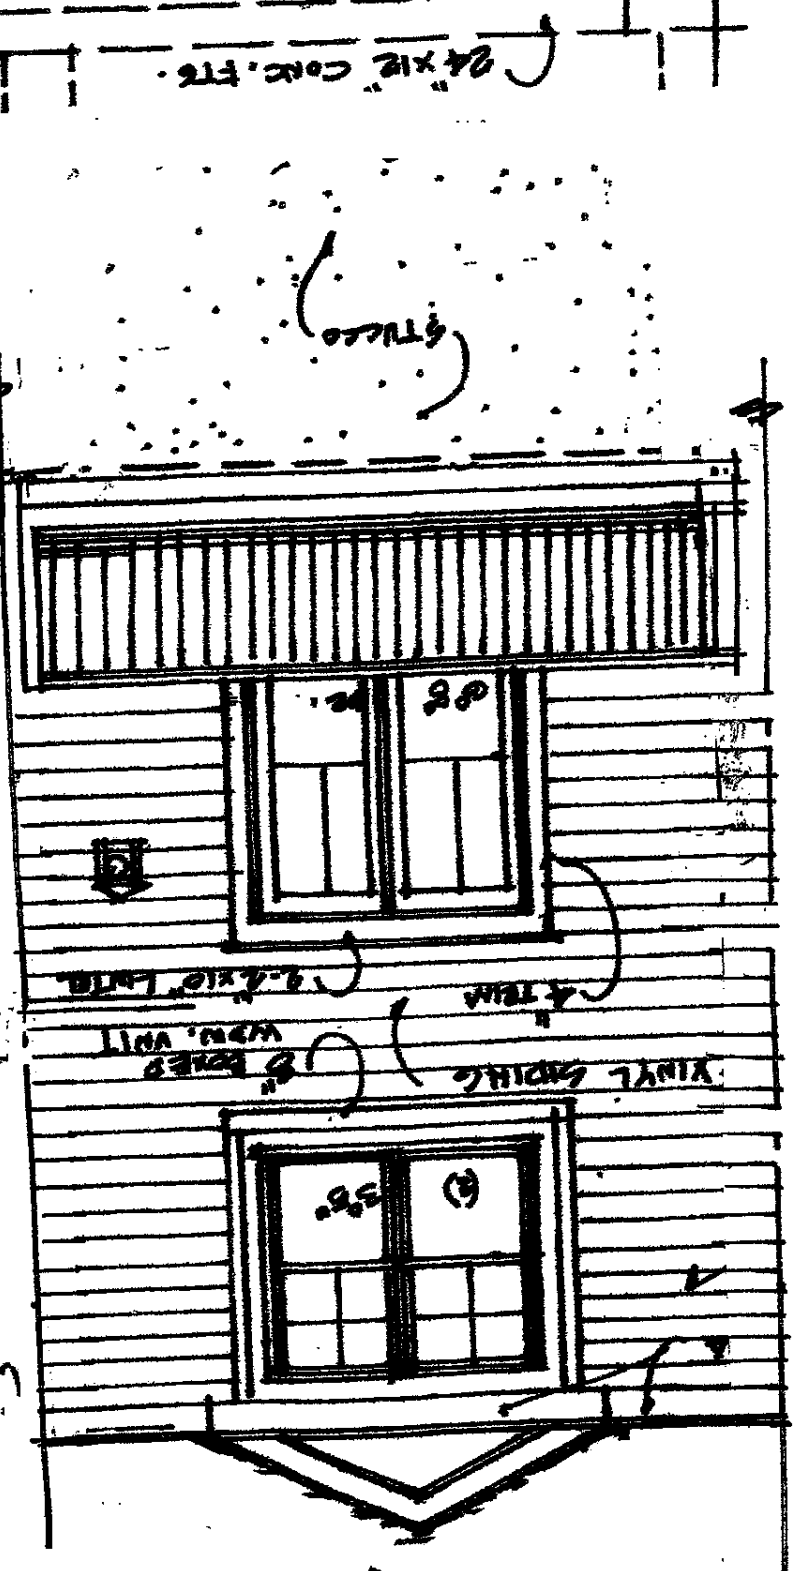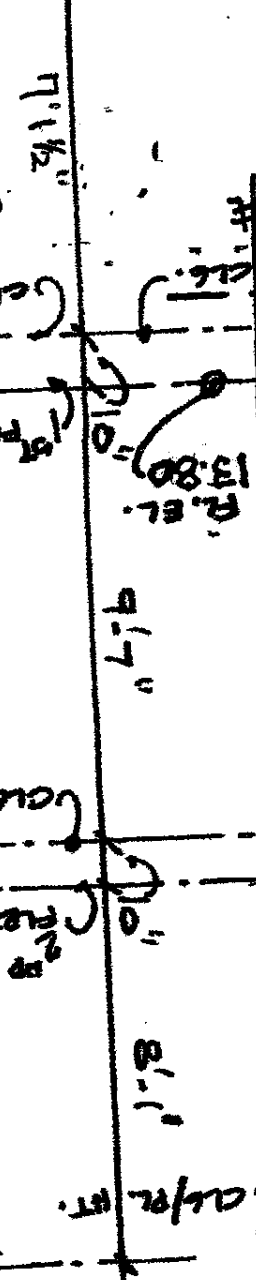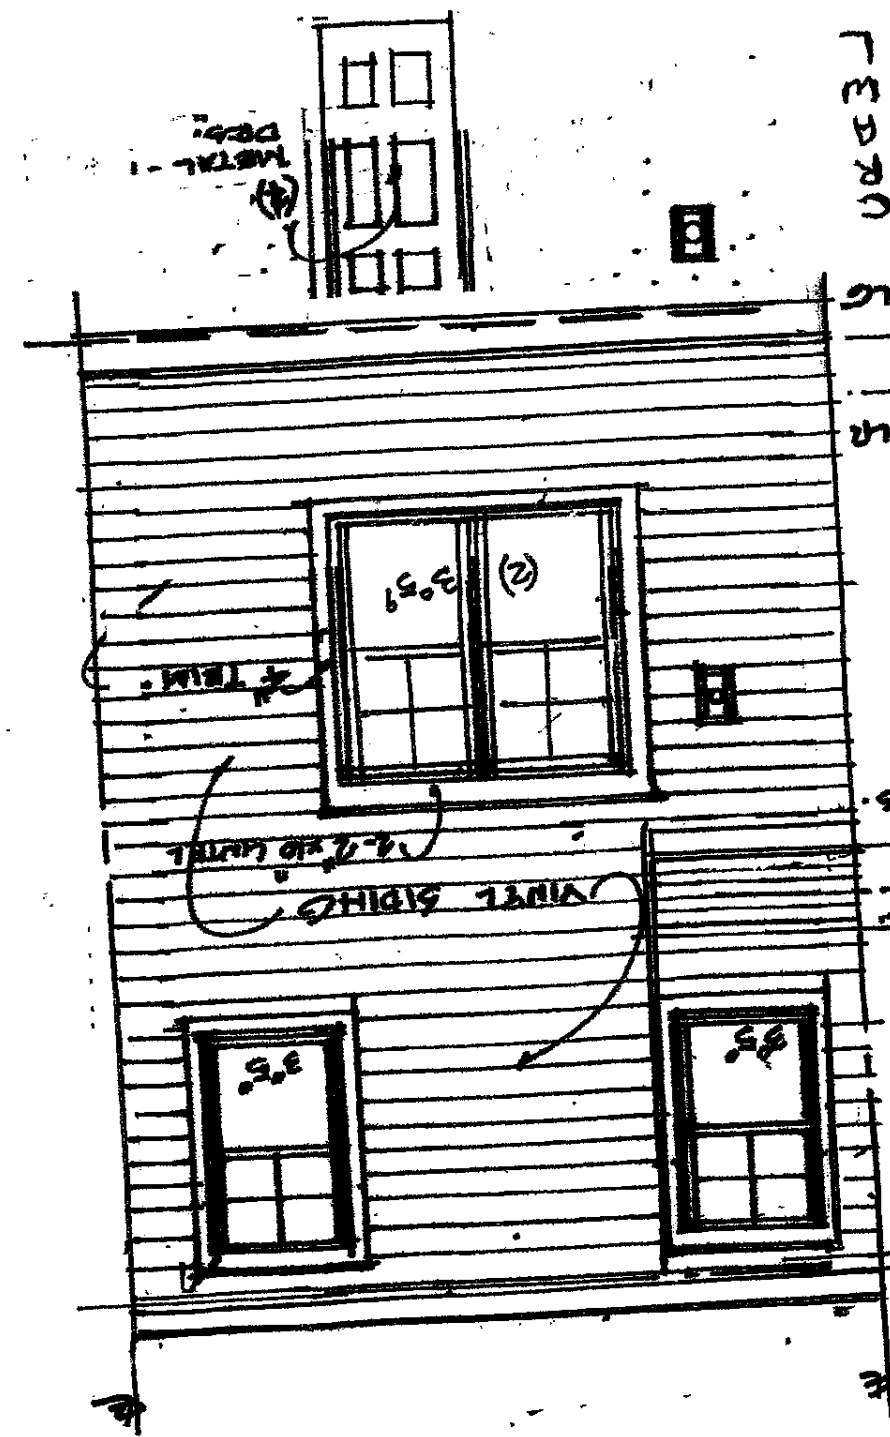

ATLANTIC CITY, N.J.
LIBERTY TERRACE
BLK. 337 LOT 18
EDWARD L. KELLNER
N.J. ARCHITECT #07771

B.R.E.
EL. 10.00



4/0 AL-5B CABLE
200 AMP SINGLE PHASE
200 AMP MAIN BREAKER




SIZE	DESCRIPTION	NUMBER	SIZE
20 12	DETER (GAS)	1	20 12
20 12	W.F. GFI RECEPTS	2	20 12
30 10	A.C. COMPRESSOR	5	20 12
30 10	A.C. COMP	7	20 12
20 12	HEATER (GAS)	9	20 12
20 12	WASHER	13	20 12
20 12	DISHWASHER	15	20 12
20 12	KIT G.F.I	17	20 12
20 12	KIT G.F.I / APPLANCE	19	20 12
20 12	KIT RECEPTS	21	20 12
20 12	SMOKE DETECTS	22	20 12
20 12	CRAWL SPACE	23	20 12
20 12		25	20 12
20 12		27	20 12
20 12		29	20 12

NO WIRING SMALLER THAN #12 AWC
ALL SMOKE DETECTORS HARD WIRED / BATTERY BACKUP
PANEL LOCATION SUBJECT TO A.C. ELECTRIC CO.
ELECTRIC PANEL BOX
DISTRIBUTION

GENERAL NOTES!


ALL PLANS DESIGNED IN CONFORMANCE W/ LATEST EDITION IBC BLDG. CODE
ALL FLOORS: 40 LB. LIVE LOAD, 10 LB. DEAD LOAD (DESIGN LOAD 50 LB/FT)
INSULATION ENVELOPE, WINDOWS, DOORS CONFORM TO N.E.C. ENERGY CODE
SINGLE FAMILY (ATTACHED AND/OR DETACHED) USE GROUP R-5 CONSTRUCTION TYPE 5A (PROTECTED WD. FRAME)
BLDG'S CONFORM TO NAYD 1988 BLDG. HTS. FOR FLOOD COMPLIANCE W/ 16" X 8" SMART VENTS PER CODE
ALL CONTRACTORS TO FOLLOW APPLICABLE WORKMANS COMPENSATION LAWS & BE PROPERLY INSURED
ALL CONSTRUCTION METHODS & MATERIALS TO CONFORM TO ALL APPLICABLE CODES & ORDINANCES
BLDG LOCATED IN ATLANTIC CNT, ATLANTIC CO, N.J. BLOCK: LOT:
ASSUMED DESIGN LOAD FOR SOIL/FOOTINGS IS 2500 PSF - WILL EASILY SUPPORT NEW CONSTRUCTION AS DESIGNER

DECK/BALCONY DETAIL

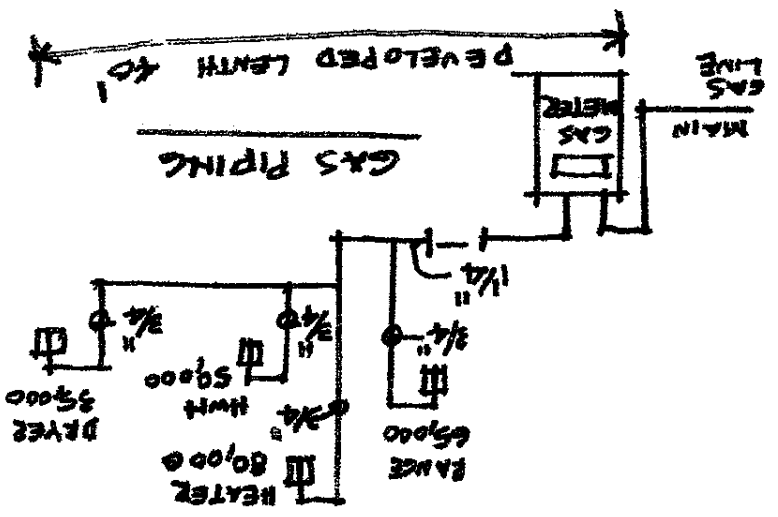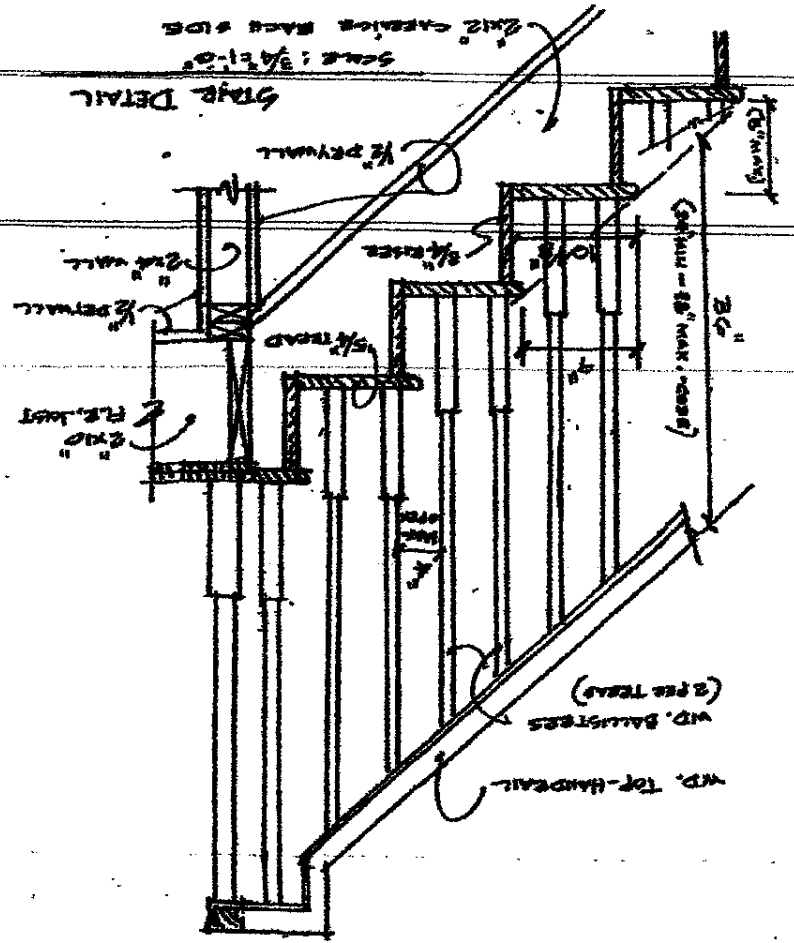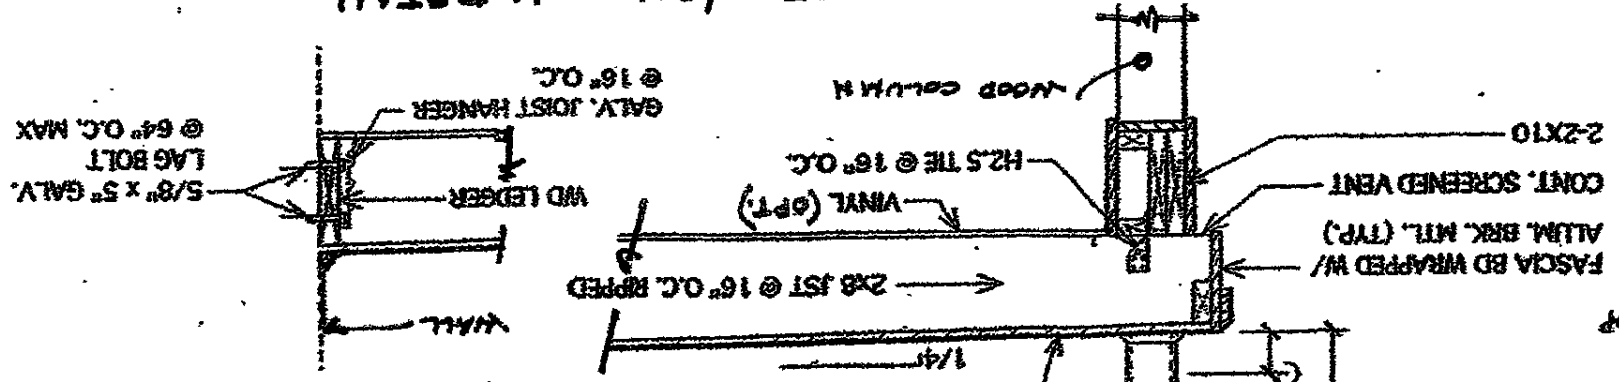

Handwritten signature



Edward L. Kellner
N.J. Architect #01771
BLOCK 339 LOT 18
9 LIBERTY TERRACE
ATLANTIC CITY, NJ 08401
REV. SUPPLEMENTAL
LOT 7



Product Specifications

4TR3030G1000N	UDT00R UNIT (a) (b)
208/230/1/60	CMR CONDNS. - V/PH/Hz (c)
18	IN. BRCH. CIR. AMPACITY
30	R. CIR. PROT. RTG. - MAX. (AMPS)
CLIMATE/F@-SCROLL	COMPRESSOR
1-1	0. USED - NO. STAGES
208/230/1/60	CLT/PH/Hz
14.1 - 73	L. AMPS (d) - L.R. AMPS
	FACTORY INSTALLED
NO	START COMPONENTS (e)
NO	INSULATION/SOUND BLANKET
NO	COMPRESSOR HEAT
PROPILLER	UDT00R FAN
23 - 1	FA. (IN.) - NO. USED
DIRECT - 1	RE DRIVE - NO. SPEEDS
2745	FM @ 0.0 IN. W.G. (f)
1 - 1/8	0. MOTORS - HP
825	DTOR. SPEED R.P.M.
200/230/1/60	CLT/PH/Hz
0.64	L. AMPS
SPINE FIN	UDT00R COIL - TYPE
1 - 24	0WS - F.P.T.
12.89	ACE AREA (SQ. FT.)
3/8	USE SIZE (IN.)
	ERF/REGRANT
95 - R-410A (O.D. UNIT) (g)	5 LBS., 11 OZ
YES	ACTORY SUPPLIED
3/4	INE SIZE - IN. O.D. GAS (h)
3/8	INE SIZE - IN. O.D. LIQ.
	HANGING SPECIFICATIONS
10°F	UDCOOLING
H X W X D	INENSIONS
34 X 30.1 X 33	RATED (IN.)
	WEIGHT
	HIPPING (LBS.)
180	ET (LBS.)

(a) Certified in accordance with the Air-Source Unitary Air-Conditioner Equipment certification program, which is based on AHRI standard 210/240.
 (b) Calculated in accordance with AHRI standard 270.
 (c) Circuit breakers or fuses.
 (d) This value shown for compressor RLA on the unit nameplate and on this specification sheet is used to compute minimum branch circuit ampacity and max. fuse size. The value shown is the branch circuit selection current.
 (e) No means no start components. Yes means quick start kit components. PTC means positive temperature coefficient starter.
 (f) Standard Air - Dry Coil - Outdoor.
 (g) This value approximate. For more precise value see unit nameplate.
 (h) Max. linear length 60 ft.; Max. lift - Liquid.
 (i) 60 ft. For greater length consult refrigerant piping software Pub. No. 32-3312-0* (* denotes latest revision).

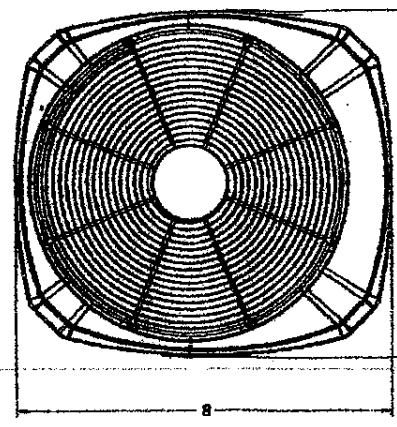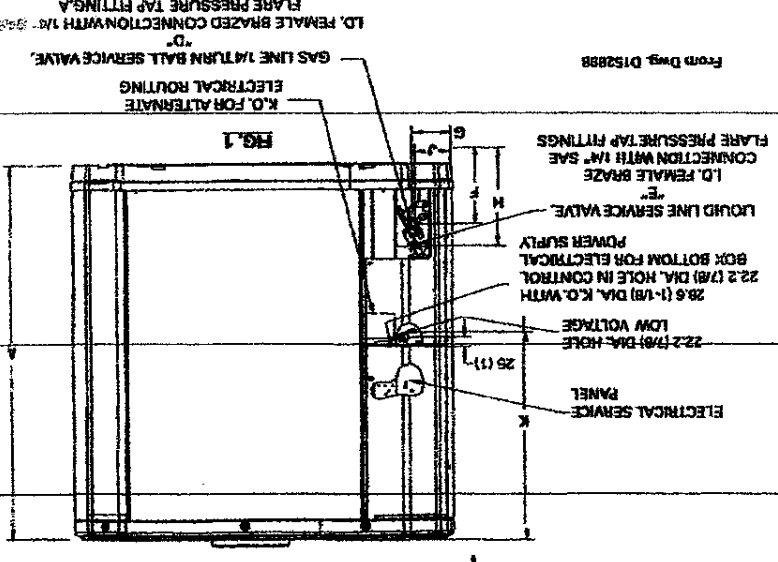


Model	Base	A	B	C	D	E	F	G	H	I	J	K
4TR3030G	3	730	829	756	3/4	3/8	143	92	210	79	508	508
		(28-3/4)	(32-5/8)	(29-3/4)			(5-5/8)	(3-5/8)	(8-1/4)	(3-1/8)	(20)	(20)

Model	A-Weighted Sound Power Level [dB(A)]
4TR3030G	71
	63 Hz
	125 Hz
	250 Hz
	500 Hz
	1000 Hz
	2000 Hz
	4000 Hz
	8000 Hz

Note: Rated in accordance with AHRI Standard 270-2008

BLOCK 339 LOT 18
 9 LIBERTY TERRACE
 ATLANTIC CITY, NJ 08401

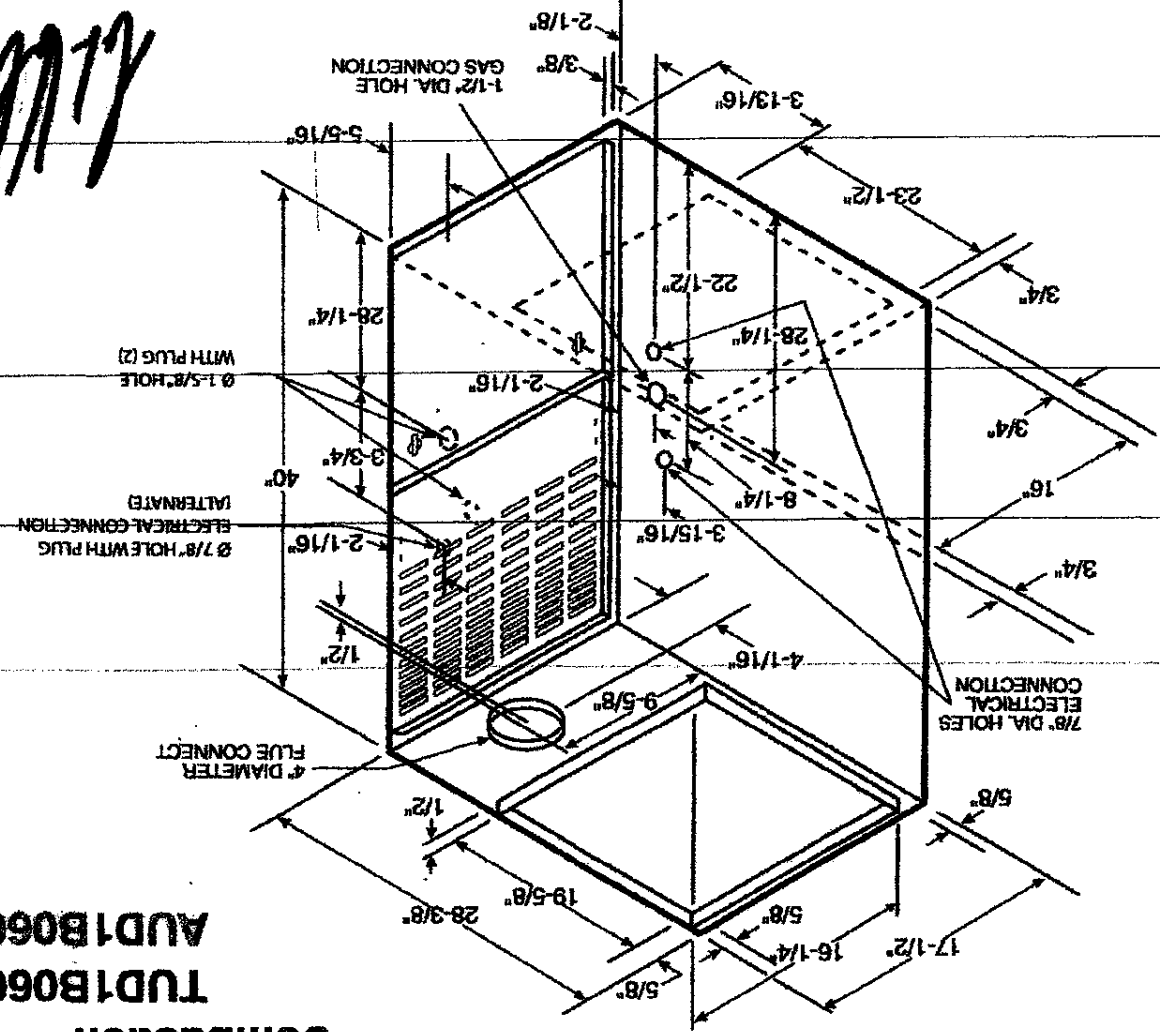

Uplow/Horizontal Gas
 Furnace "Fan-Assisted
 Combustion"
 TUD1B060A9361A
 AUD1B060A9361A

MODEL	1 - LOW - Red	2 - MED.-LOW - Yellow	3 - MED.-HIGH - Blue	4 - HIGH - Black	SPEED TAP	0.10	0.20	0.30	0.40	0.50	0.60	0.70
TUD1B060A9361A	1588	1554	1517	1468	1412	1351	1278	1135	978	826	660	508
AUD1B060A9361A	1090	1093	1076	1052	1026	978	826	660	508	356	204	152

FURNACE AIRFLOW (CFM) VS. EXTERNAL STATIC PRESSURE (IN. W.C.)
 MODEL SPEED TAP
 0.10 0.20 0.30 0.40 0.50 0.60 0.70

HEATING SPECIFICATIONS (Supplement)

MODEL	800	900	1000	1100	1200	1300	1400
TUD1B060A9361A	36	37	37	38	38	39	39
AUD1B060A9361A	32	33	33	34	34	35	35